
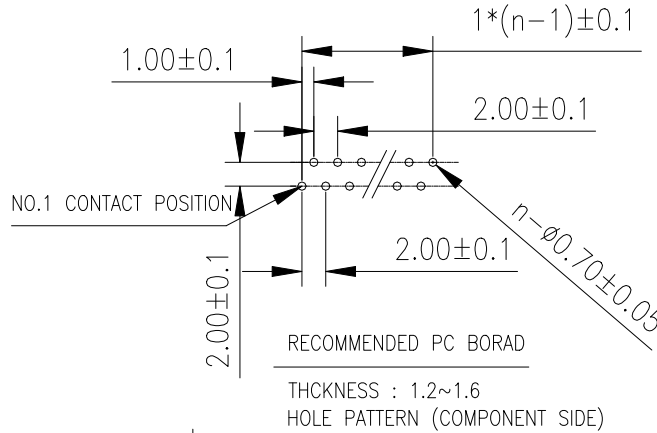



RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

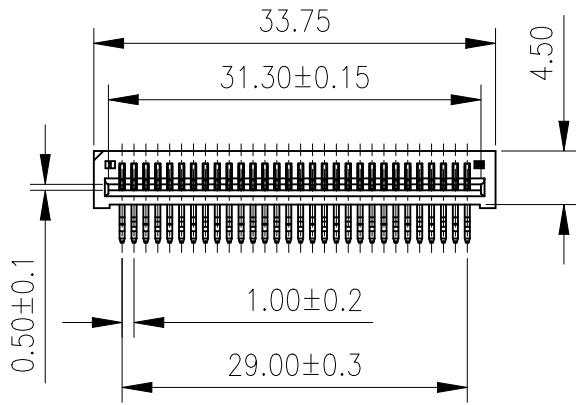

Specifications :



- Voltage rating: 50V Max. DC / AC
- Current rating: 0.5A Max. DC / AC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤30mΩ
- Insertion Force: 7~11N

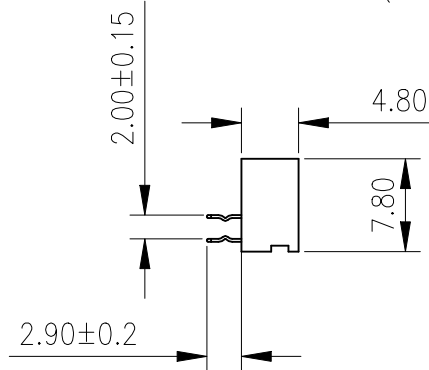

1042 W R-30-PT SN B G

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No. 1042
- ② Category: W-wafer
- ③ Connector Type: R-Right Angle 90°
- ④ Row No.-Pin No: 30Pin
- ⑤ Plastic material: PT- PBT UL94V-0
- ⑥ Plating Code: SN - tin plating nickel,
- ⑦ Color: B-Black;
- ⑧ Packing: G- tube

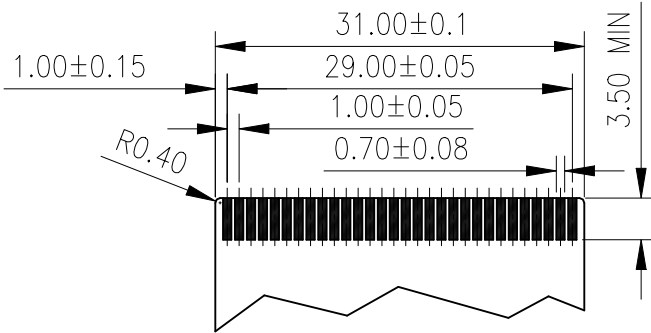

GENERAL TOLERANCE

.X	±0.35
.XX	±0.25
.XXX	±0.15
X.' ±Z'	

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

PART NO.
1042WR-30-PTSNBG

TITLE
1.00mm FPC CONN

APPROVAL	CHECK	DRAWN	DATE
Jack Zhang	Joshua	Yike Zhang	2023/06/13

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	X1	CD

20231123	X1	/	Update surface	Yike Zhang	Larry Yang
20230613	X0	/	Initial release	Dingping Ou	Larry Yang
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL