

Crimp specification					
Type Document	Crimp Specification	Revised /Edition	A		
Date Issued:	Date Issued: 2023/08/29 Data Revised:				
Subject: 1204TF	Issued By:				
Pi	Pitch Terminal crimp specification				

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

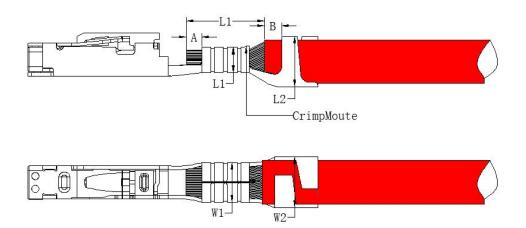

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification						
Type Document	Crimp Specification	Revised /Edition	Α			
Date Issued:	Date Issued: 2023/08/29 Data Revised: 2023/08/2					
Subject: 1204TF	Subject: 1204TF Issued By:					
Pitch Terminal crimp specification			Engineering Dept.			

Requirement:

Subject: FLR-B or equivalent type electric wire					
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#18~#16	1.00mm ² ~1.50mm ²	1.90mm~2.40mm	0.30mm~0.80mm	0.30mm~1.00mm	3.90mm~4.40mm
Wire Gauge	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile
(AWG#)	Width (W1)	Height(H1)	Width (W2)	Height(H2)	Strength
1.00mm²	1.95±0.05mm	1.16±0.05mm	2.70+0.05mm —	2.30±0.05mm	108N
1.50mm²	1.98±0.05mm	1.35±0.05mm	2.70±0.05HIIII	2.50±0.05mm	150N

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature:	FX	ENG
Dongguan St	ESO Technol	oav CoLtd



Crimp specification					
Type Document	Crimp Specification	Revised /Edition	Α		
Date Issued:	Date Issued: 2022/09/27 Data Revised:				
Subject: 1204THM	Subject: 1204THM				
4.00mr	n Pitch Terminal crimp speci-	fication	Engineering Dept.		

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

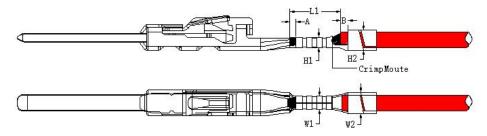

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification					
Type Document Crimp Specification Revised /Edition A					
Date Issued:	Date Issued: 2022/09/27 Data Revised: 2022/09/27				
Subject: 1204THM	Subject: 1204THM Issued By:				
4.00mn	4.00mm Pitch Terminal crimp specification				

Requirement:

	Subject:FLRYW or AVSS equivalent type electric wire					
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out	
#20~#18	0.50mm ² ~0.75mm ²	1.60mm~1.90mm	0.40mm~1.00mm	0.30mm~0.70mm	3.40mm~3.70mm	
Wire Gauge	Conductor	Crimp Area	Insulator Crimp Area		Terminal Tensile	
(AWG#)	Width(W1)	Height(H1)	Width (W2)	Height(H2)	Strength	
FLRYW-A 0.50mm ²	1.47±0.03mm	0.99±0.03mm	4.00005	1.70±0.05mm	60N	
AVSS 0.75mm ²	1.50±0.03mm	1.11±0.03mm	1.90±0.05mm	2.05±0.05mm	90N	

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: _	FX	ENG	
Dongguan SES	SO Techr	nology Co	I td



Crimp specification					
Type Document	Crimp Specification	Revised /Edition	А		
Date Issued:	Date Issued: 2023/02/23 Data Revised:				
Subject: 1204TM	Subject: 1204TM				
4.00mr	4.00mm Pitch Terminal crimp specification				

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

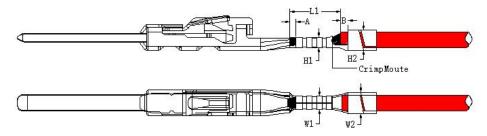

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification				
Type Document Crimp Specification Revised /Edition A				
Date Issued:	2023/02/23			
Subject: 1204TM	Subject: 1204TM Issued By:			
4.00mm	Pitch Terminal crimp speci-	fication	Engineering Dept.	

Requirement:

Subject:FLRYW or equivalent type electric wire						
AWG#	Conductor (mm²)	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out	
#24~#22	0.22mm ² ~0.35mm ²	1.20mm~1.45mm	0.40mm~1.00mm	0.30mm~0.70mm	3.40mm~3.70mm	
Wire Gauge	Conductor (Crimp Area Insulato		Crimp Area	Terminal Tensile	
(AWG#)	Width(W1)	Height(H1)	Width (W2)	Height(H2)	Strength	
0.22mm²	1.37±0.03mm	0.81±0.03mm	1.55±0.05mm	1.40±0.05mm	40N	
0.35mm ²	1.37 ±0.0311111	0.87±0.03mm	1.60±0.05mm	1.60±0.05mm	50N	

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: FX ENG

Dongguan SESO Technology Co.,Ltd