

## Crimp specification

|   |                     |                  |                                 |
|---|---------------------|------------------|---------------------------------|
| Type Document   | Crimp Specification | Revised /Edition | A1                              |
| Date Issued:  | 2020/11/23          | Data Revised:    | 2023/09/12                      |
| Subject: 1300T<br>1.30mm Pitch Terminal crimp specification |                     |                  | Issued By:<br>Engineering Dept. |

### Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

### Position Graph:

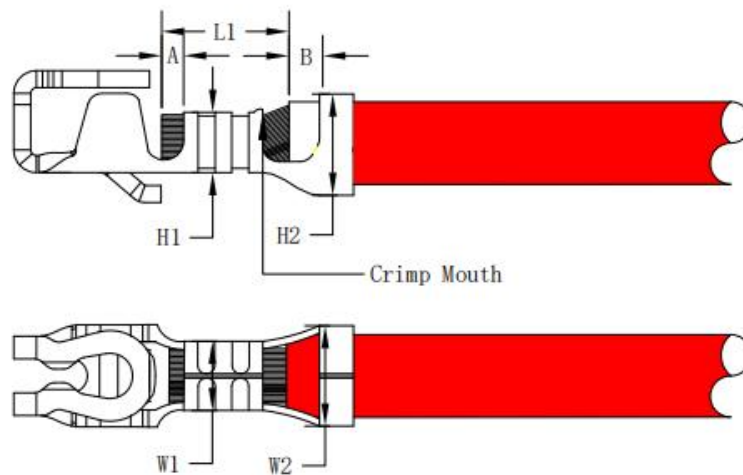

### Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

| Crimp specification   |                     |                  |                                 |
|---|---------------------|------------------|---------------------------------|
| Type Document   | Crimp Specification | Revised /Edition | A1                              |
| Date Issued:  | 2020/11/23          | Data Revised:    | 2023/09/12                      |
| Subject: 1300T<br>1.30mm Pitch Terminal crimp specification |                     |                  | Issued By:<br>Engineering Dept. |

Requirement:

| Subject:UL1061or equivalent type electric wire |   |             |                      |                                       |                              |
|--|---|-------------|----------------------|---------------------------------------|------------------------------|
| AWG#   | Conductor (mm <sup>2</sup> )              |             | Insulation Diameter  | Insulator skins length<br>(Dim .B) mm | Dim. L1 (mm) out             |
| #28~#26  | 0.08mm <sup>2</sup> ~0.128mm <sup>2</sup> |             | 0.98mm(max)          | 0.2~0.4mm                             | 1.00~1.20mm                  |
| Wire Gauge<br>(AWG#)                           | Conductor Crimp Area                      |             | Insulator Crimp Area |                                       | Terminal Tensile<br>Strength |
|  | Width (W1)                                | Height(H1)  | Width (W2)           | Height(H2)                            |                              |
| #28  | 0.87±0.03mm                               | 0.52±0.03mm | 1.10mm (max)         | 1.10±0.05mm                           | 0.90kgf                      |
| #26  |   | 0.55±0.03mm |                      | 1.20±0.05mm                           | 1.40kgf                      |

Remarks

Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Signature: JACK ENG  
SWB CONNECTOR CO.,LTD.

# Crimp specification

|   |                     |                  |                                 |
|---|---------------------|------------------|---------------------------------|
| Type Document   | Crimp Specification | Revised /Edition | A1                              |
| Date Issued:  | 2020/11/23          | Data Revised:    | 2023/09/12                      |
| Subject: 1300T<br>1.30mm Pitch Terminal crimp specification |                     |                  | Issued By:<br>Engineering Dept. |

| Date       | REV | DESCRIPTION                   | MODIFY | APPROVAL   |
|------------|-----|-------------------------------|--------|------------|
| 2020/11/23 | A   | Initial Issued                | /      | Kim Huang  |
| 2023/09/12 | A1  | Crimp height and width update | fx     | Jack zhang |