



Crimp specification								
Type Document	Crimp Specification	Revised /Edition	A					
Date Issued:	2020/11/23	Data Revised:	2020/11/23					
Subject: 1506TM	Issued By:							
1.50mm	Engineering Dept.							

Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)


According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

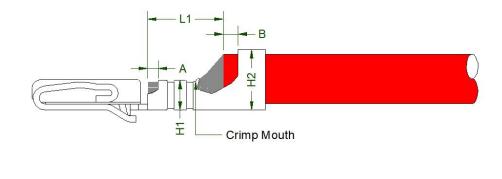



Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





Crimp specification								
Type Document	Crimp Specification	Revised /Edition	A					
Date Issued:	Date Issued: 2020/11/23 D		2020/11/23					
Subject: 1506TM	Issued By:							
1.50mm	Engineering Dept.							

Requirement:

Subject:UL1061 or equivalent type electric wire								
AWG#	Conductor (mm ²)	Insulation Diameter	er Insulator skins length (Dim .B) mm		Copper wire leakage size (Dim .A) mm		Dim. L1 (mm) out	
#28~#24	0.08mm ² ~0.205mm ²	1.20mm(max)	0.30mm~0.70mm (0.10mm~0.50mm	1.60mm~2.10mm		
Wire Gauge Conductor		tor Crimp Area	Crimp Area		Insulator Crimp Area		Terminal Tensile	
(AWG#)	Width (W1) Height(H) Width (W2)		2)	Height(H2)	Strength	
#28		0.51±0.03m	0.51±0.03mm			1.20±0.05mm	0.90kgf	
#26	#26 1.03±0.03mm		0.57±0.03mm		m	1.30±0.05mm	1.40kgf	
#24		0.62±0.03m	m			1.40±0.05mm	2.30kgf	

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>JACK</u> ENG Dongguan SESO Technology Co.,Ltd