Crimp specification								
Type Document								
Date Issued:	2020/11/05							
Subject: 1800T Issued By:								
1.80mm	Engineering Dept.							

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

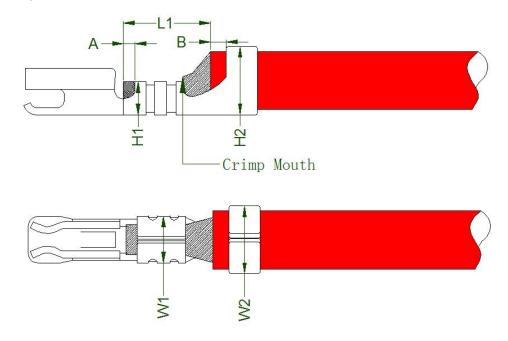

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2 $\,$
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.

Crimp specification								
Type Document Crimp Specification Revised /Edition A								
Date Issued:	2020/11/05							
Subject: 1800T	Issued By:							
1.80mm	Engineering Dept.							

Requirement:

Subject:UL1061or equivalent type electric wire							
AWG#	Conductor (mm²)		Insulation Diameter		Insulator skins length (Dim .B) mm		Dim. L1 (mm) out
#26~#22	0.128mm ² ~0.325	mm² 1.00mm		-1.20mm	(0.30~0.50mm	1.50~1.70mm
Wire Gauge	Conductor	onductor Crimp Area		Ins	Insulator Crimp Area		Terminal Tensile
(AWG#)	Width (W1)	Height(H1)		Width	(W2)	Height(H2)	Strength
#26		0.77±0.03mm				1.40±0.05mm	1.40kgf
#24	1.20±0.03mm	0.	79±0.03mm	1.43±0.05mm	1.50±0.05mm	2.30kgf	
#22		0.	87±0.03mm			1.60±0.05mm	3.60kgf

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Signature: <u>JACK</u> ENG SWB CONNECTOR CO.,LTD.

Crimp specification								
Type Document								
Date Issued:	2020/11/05							
Subject: 1800TL Issued By:								
1.80mm	Engineering Dept.							

Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

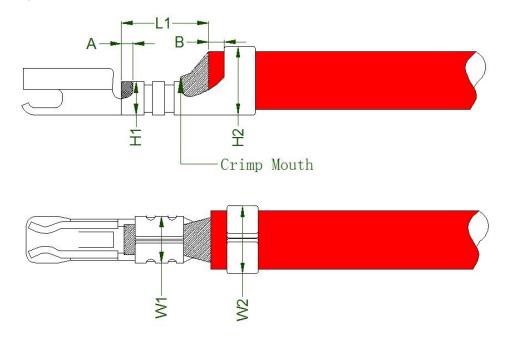

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2 $\,$
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.

Crimp specification							
Type Document Crimp Specification Revised /Edition A							
Date Issued:	2020/11/05						
Subject: 1800TL	Issued By:						
1.80mm	Engineering Dept.						

Requirement:

Subject:UL1061or equivalent type electric wire							
AWG#	Conductor (mm²)		Insulation Diameter		Insulator skins length (Dim .B) mm		Dim. L1 (mm) out
#28~#26	0.08mm²~0.128mm²		0.90mm~1.00mm		0.30~0.50mm		1.50~1.70mm
Wire Gauge	Conductor Crimp		o Area Insulator C		rimp Area	Terminal Tensile	
(AWG#)	Width (W1)	Н	eight(H1)	Width	(W2)	Height(H2)	Strength
#28	1.03±0.03mm	0.64±0.03mm		1.20+0.05mm		1.28±0.05mm	0.90kgf
#26	0.	0.67±0.03mm		7111111	1.35±0.05mm	1.40kgf	

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Signature: <u>JACK</u> ENG SWB CONNECTOR CO.,LTD.