




RoHS





This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

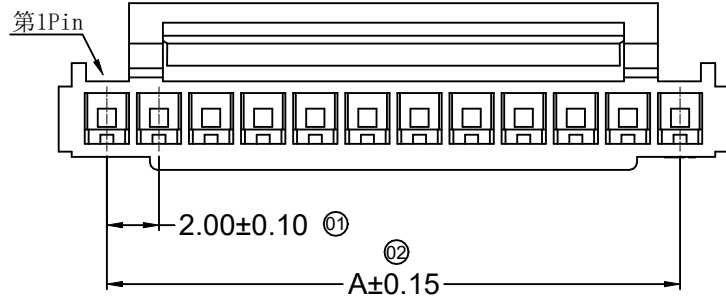

- Specifications :
- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1000V AC/minute
 - Temperature range: -40°C~+105°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing: ≤40mΩ
 - Suitable SESO Terminal: 2011T-A
 - Mates With SESO Wafer: 2011W-A

2011 H X - XX A - N0 XX XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category: H-HSG
- ③ Appearance type: Blank-Ordinary
- ④ Row No.-Pin No Per Row: XX-02P~16P
- ⑤ Plug the Pin & Special No.: A-With Lock
- ⑥ Plastic material: N0-PA66 UL 94V-0
- ⑦ Color : Blank-Natural Color
BK-Black
- ⑧ Whether containing halogen:
HF-Halogen free
Blank-Containing halogen

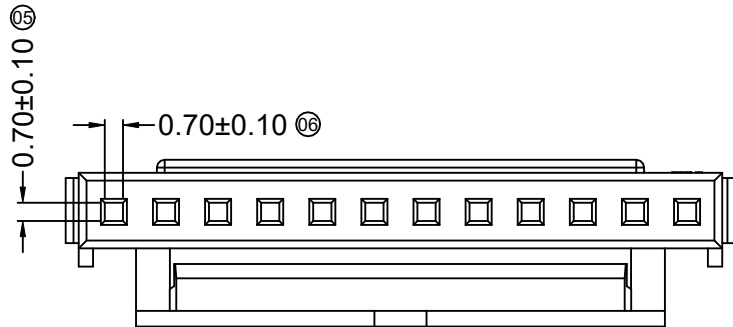
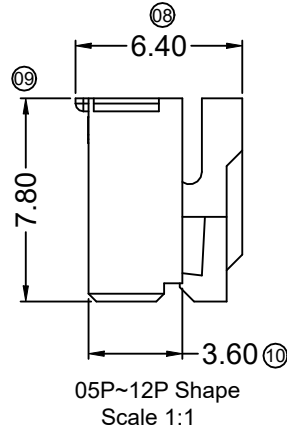
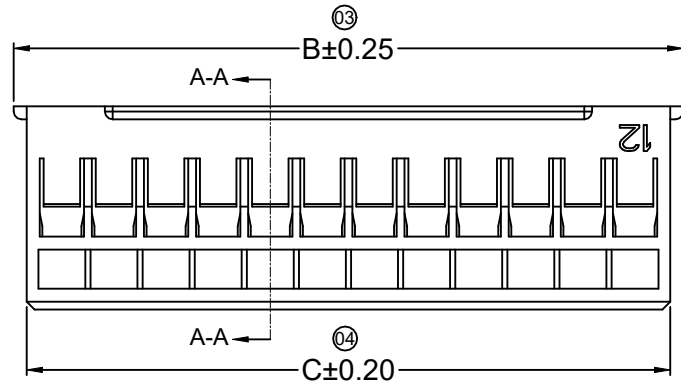


Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	5.70	4.70	09	16.00	19.70	18.70
03	4.00	7.70	6.70	10	18.00	21.70	20.70
04	6.00	9.70	8.70	11	20.00	23.70	22.70
05	8.00	11.70	10.70	12	22.00	25.70	24.70
06	10.00	13.70	12.70	13	24.00	27.70	26.70
07	12.00	15.70	14.70	14	26.00	29.70	28.70
08	14.00	17.70	16.70				

GENERAL TOLERANCE						APPROVAL				PART NO.								
.X ±0.30						东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				2011H-XXA-N0XX								
.XX ±0.20										TITLE 2.00mm Crimp Style Connector								
.XXX ±0.10										APPROVAL				CHECK	DRAWN	DATE		
X.° ±2°										PROJECT	Jack Zhang	Larry Yang	Guo	2021.04.20				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT				UNIT	SCALE	SHEET	REV	NUMBER				
2020.5.07	C	EN20190805002	Update Drawing Frame, The Same ECR And ECN NO.	YYting	Robing					mm	1:1	1/1	C	A-022				

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

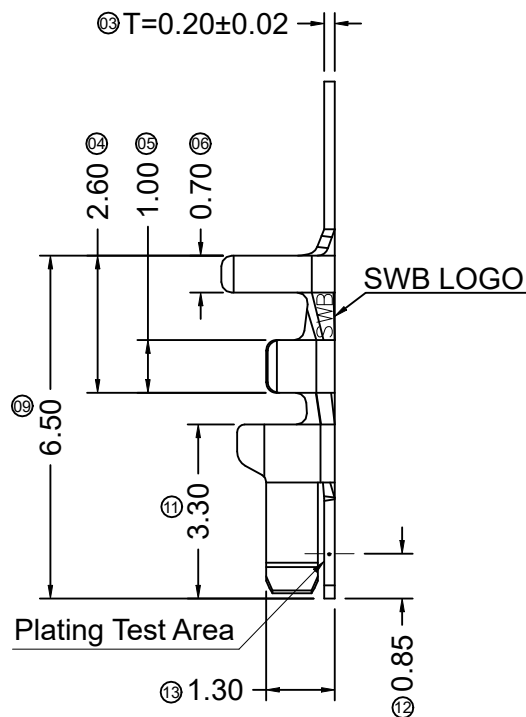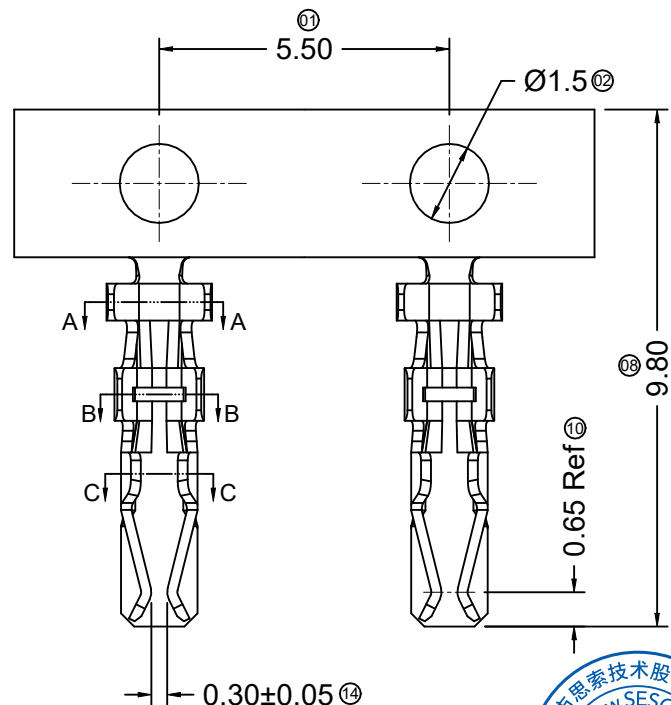


Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ

2011 T X - P XX X - AX
① ②③ ④⑤⑥ ⑦


- ① Series Number
- ② Category: T-terminal
- ③ Shape: Blank-ordinary L-Lower Crimp
- ④ Material: P-Phosphor bronze
- ⑤ Plating Code: SN-Bright tin plating
G01-Contact Gold flash
V01-entirety Gold flash
- ⑥ Plating method: Blank-Stamping before plating
- ⑦ Mold No./Mark/Special No. :
A-Mating 2011-A HSG、With SWB LOGO
A1-Mating 2011-A HSG、Without SWB LOGO



SECTION A-A
SCALE 1:1



SECTION B-B
SCALE 1:1



SECTION C-C
SCALE 1:1

2011T-PV01-A	Phosphor Bronze	24-28 AWG	1.45mm(Max)	2.00	2.20	1.70	1.30	2011H-A
2011T-PG01-A								
2011T-PSN-A								
2011TL-PV01-AX		26-28 AWG	1.00mm(Max)	1.85	1.85	1.25	1.25	
2011TL-PG01-AX								
2011TL-PSN-AX								
PART NO	Material	Wire Range	Insulation O.D.	DIM a	DIM b	DIM c	DIM d	Used In SESO Housing

2020.05.11	B	EN20170803001	Update Drawing Frame, The Same ECR And ECN NO.	YYting	Robing
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
X.° ±2°
PROJECT
Jack Zhang

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

APPROVAL	CHECK	DRAWN	DATE
Jack Zhang	Larry Yang	Guo	2017/11/03

PART NO. 2011TX-PXX-AX				
TITLE 2.00mm Crimp Style Connectors				
UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	B	A-014

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules






■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2011H

2011 W R X - XX KA2 - N0 SN XX

① ②③④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Connector Type: R-Right Angle 90°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No Per Row: XX-02P~16P
- ⑥ Special No.:
KA2-With Kink And Link Stopper DIP-2.50mm
- ⑦ Plastic material: N0 -PA66 UL 94V-0
- ⑧ Plating Code: SN-Bright Tin Plating
- ⑨ Color : Blank-Natural Color

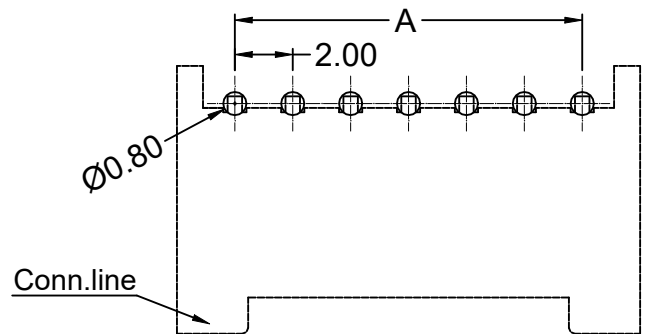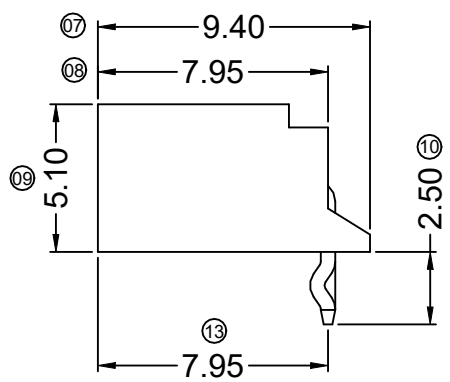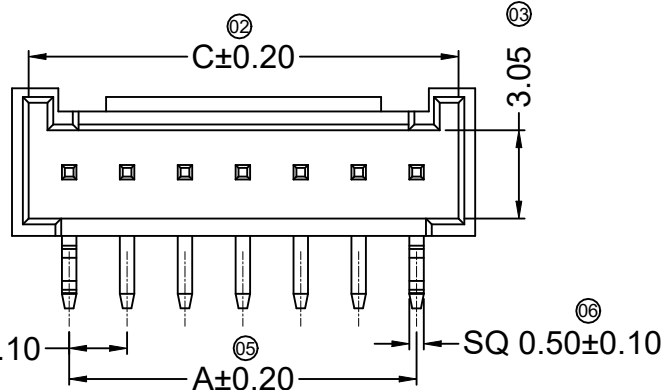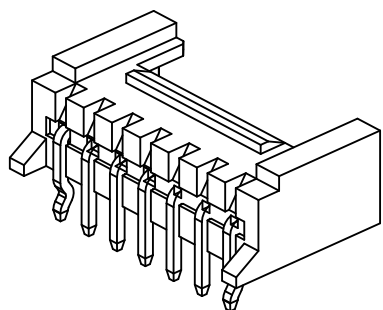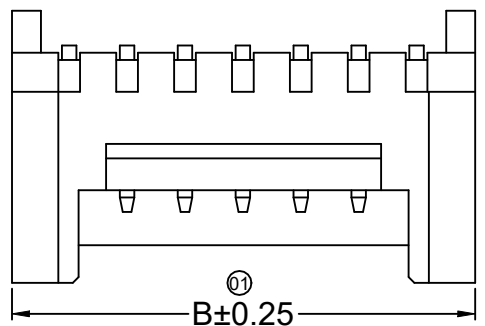

Recommended P.C.B Layout T=1.6mm
General Tolerance±0.05




Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	6.00	4.85	10	18.00	22.00	20.85
03	4.00	8.00	6.85	11	20.00	24.00	22.85
04	6.00	10.00	8.85	12	22.00	26.00	24.85
05	8.00	12.00	10.85	13	24.00	28.00	26.85
06	10.00	14.00	12.85	14	26.00	30.00	28.85
07	12.00	16.00	14.85	15	28.00	32.00	30.85
08	14.00	18.00	16.85	16	30.00	34.00	32.85
09	16.00	20.00	18.85				

GENERAL TOLERANCE						PART NO.			
.X ±0.30						2011WR-07KA2-N0SN			
.XX ±0.20						TITLE 2.00mm Crimp Style Connectors			
.XXX ±0.10						UNIT SCALE SHEET REV NUMBER			
X.° ±2°						mm 1:1 1/1 C A-000			
2020.4.28	C	ER20190430002	Update Drawing Frame	YYting	Robing	APPROVAL	CHECK	DRAWN	DATE
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT	Jack Zhang	Larry Yang	Guo
									2018/02/25

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

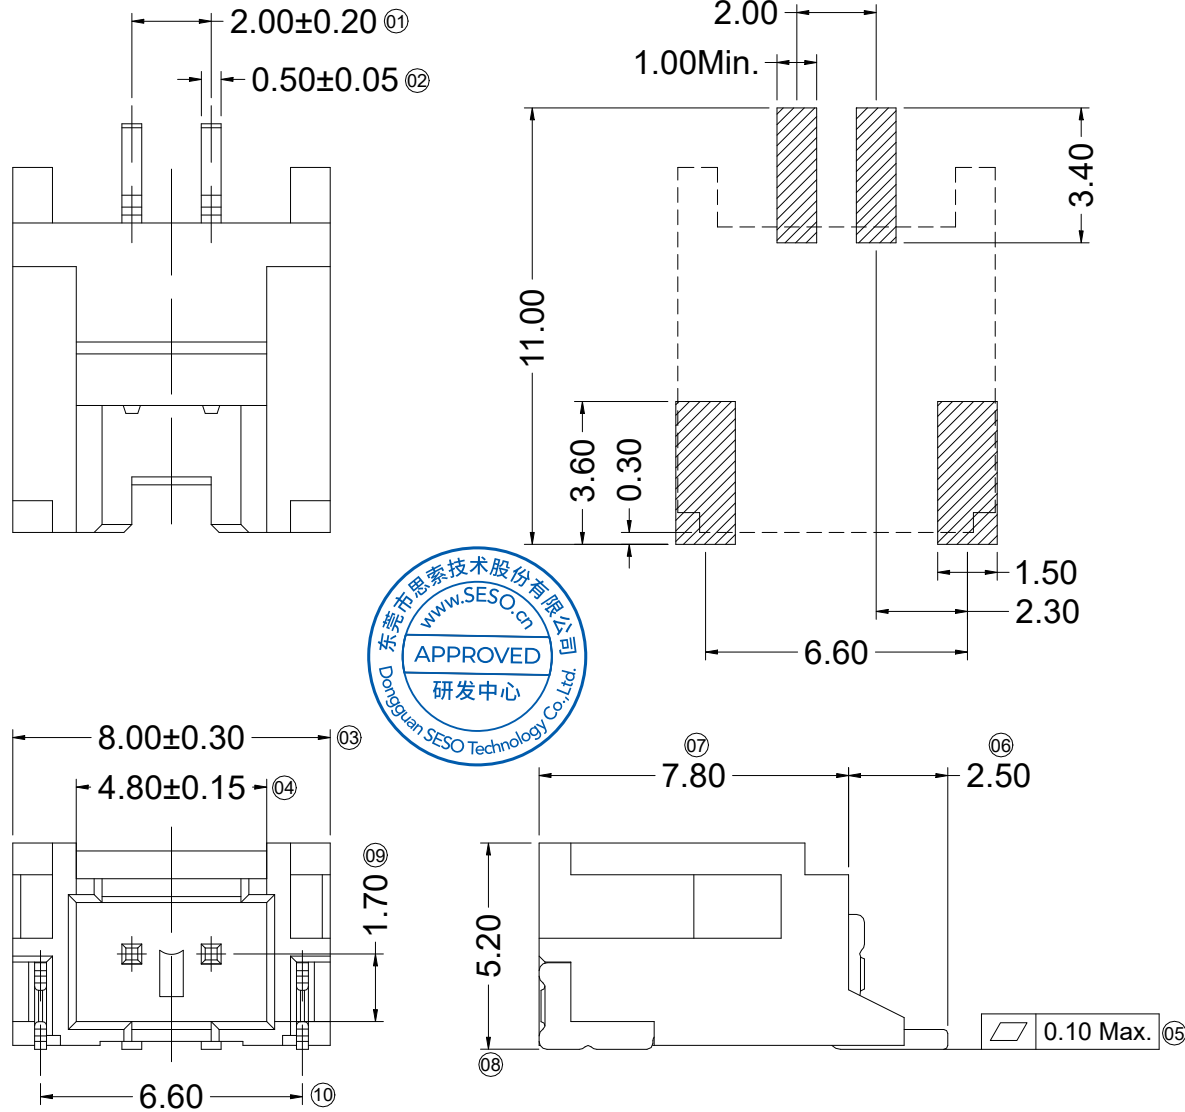

Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$
- Material(Pin): Brass
- Mates With SESO Housing: 2011H-XXA

2011 WRS - 02 A1 - 9T SW XX



① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Connector Type: R-90°
- ④ Mounting Type: S-SMT
- ⑤ Row No.-Pin No Per Row: 02P-Single Row
- ⑥ Plug the Pin & Special No.: A1-All Bags With Buckle
- ⑦ Plastic material: 9T -PA9T 94V-0
- ⑧ Plating Code: SW-Matte Tin Plating
- ⑨ Color : Blank-Natural Color

					GENERAL TOLERANCE .X ± 0.35 .XX ± 0.25 .XXX ± 0.15 X. $^{\circ}$ $\pm 2^{\circ}$				SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				PART NO. 2011WRS-02A1-9TSWXX				
					APPROVAL CHECK DRAWN DATE Jack Zhang Larry Yang Guo 2019.12.21				TITLE 2.00mm Crimp Style Connectors								
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT	UNIT	SCALE	SHEET	REV	NUMBER						
1		2		4		5	mm	1:1	1/1	A	A-010						

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules




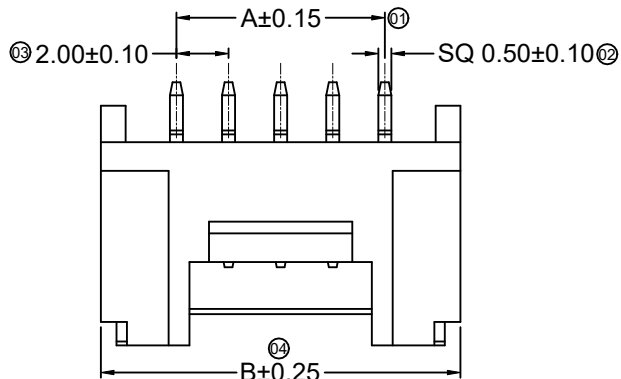


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2011H-A

2011 W R S - XX A - LP SN XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Connector Type: R-Right Angle 90°
- ④ Mouting Type: S-SMT
- ⑤ Row No.-Pin No Per Row: XX-02P~16P
- ⑥ Special No.: A-With Located Block
- ⑦ Plastic material: LP -LCP UL 94V-0
- ⑧ Plating Code: SN-Bright Tin Plating
- ⑨ Color : Blank-Natural Color

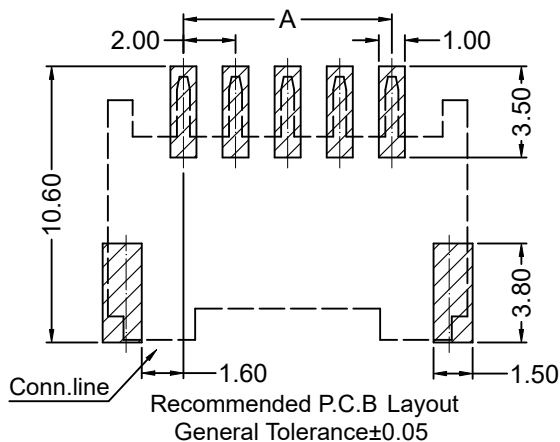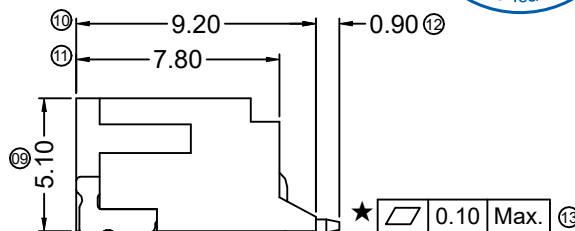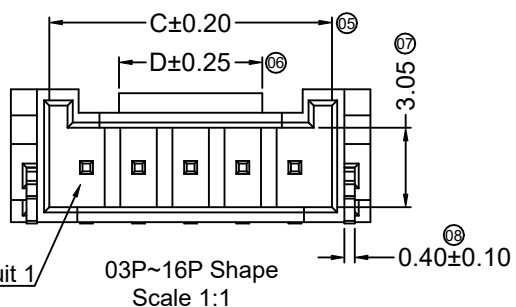

02P Shape Scale 1:1

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
02	2.00	7.80	4.85	2.70	10	18.00	23.80	20.85	15.50
03	4.00	9.80	6.85	3.20	11	20.00	25.80	22.85	15.50
04	6.00	11.80	8.85	3.50	12	22.00	27.80	24.85	15.50
05	8.00	13.80	10.85	5.50	13	24.00	29.80	26.85	15.50
06	10.00	15.80	12.85	7.50	14	26.00	31.80	28.85	15.50
07	12.00	17.80	14.85	9.50	15	28.00	33.80	30.85	15.50
08	14.00	19.80	16.85	11.50	16	30.00	35.80	32.85	15.50
09	16.00	21.80	18.85	13.50					

					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				PART NO. 2011WRS-XXA-LPSN					
					APPROVAL CHECK DRAWN DATE				TITLE 2.00mm Crimp Style Connector					
2020.4.23	F	EN20190605002	Update Drawing Frame	YYting	Robing	Jack Zhang	Larry Yang	Guo	2014/08/21	UNIT	SCALE	SHEET	REV	NUMBER
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT				mm	1:1	1/1	F	A-084

SMS 东莞市思索技术股份有限公司
 Dongguan SESO Technology Co.,Ltd.

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

■ Specifications :







- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2011H-A

2011 W R X - XX A4 - N0 SN XX

① ②③④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: R-Right Angle 90°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-02P~16P
- ⑥ Special No.:
A4-With Link Stopper DIP-3.20mm
Inside groove 2.70mm
- ⑦ Material: N0 -PA66 UL 94V-0
- ⑧ Plating Category: SN-Bright Tin Plating
- ⑨ Color : Blank-Natural Color

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	6.00	4.85	10	18.00	22.00	20.85
03	4.00	8.00	6.85	11	20.00	24.00	22.85
04	6.00	10.00	8.85	12	22.00	26.00	24.85
05	8.00	12.00	10.85	13	24.00	28.00	26.85
06	10.00	14.00	12.85	14	26.00	30.00	28.85
07	12.00	16.00	14.85	15	28.00	32.00	30.85
08	14.00	18.00	16.85	16	30.00	34.00	32.85
09	16.00	20.00	18.85				

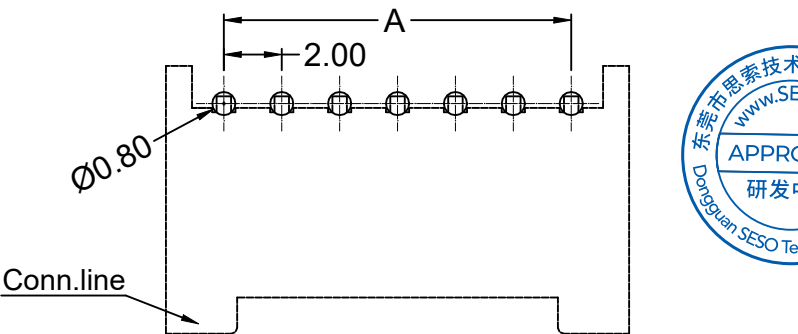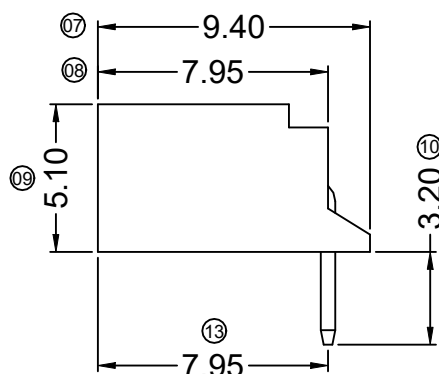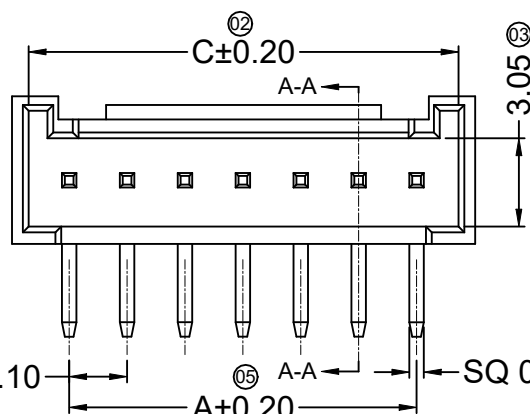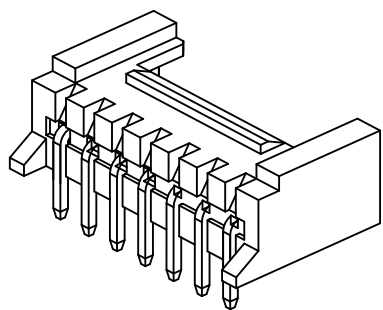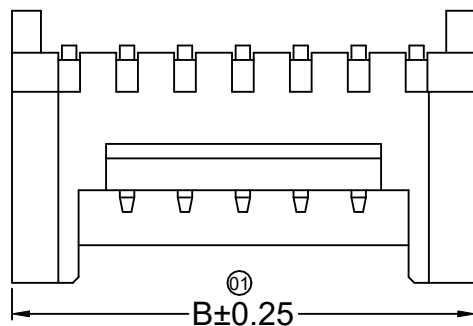

Conn.line
Recommended P.C.B Layout T=1.6mm
General Tolerance±0.05

						<p>GENERAL TOLERANCE</p> <p>.X ±0.30</p> <p>.XX ±0.20</p> <p>.XXX ±0.10</p> <p>X.° ±2°</p>				<p>SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.</p>				<p>PART NO. 2011WR-XXA4-N0SN</p>				
						<p>APPROVAL</p> <p>CHECK</p> <p>DRAWN</p> <p>DATE</p>				<p>TITLE 2.00mm Crimp Style Connector</p>								
2020.4.28	C	ER20190430002	Update Drawing Frame	YYting	Robing	<p>Jack Zhang</p>				<p>Larry Yang</p>								
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	<p>PROJECT</p> <p>Guo</p>				<p>2016/10/31</p>								
						<p>UNIT mm</p> <p>SCALE 1:1</p> <p>SHEET 1/1</p> <p>REV C</p> <p>NUMBER A-000</p>												

RoHS







This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

■ Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ
- Material(Pin): Brass
- Mates With SESO Housing: 2011H-A

2011 W R X - XX A X HF - N0 SN XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: R-Right Angle 90°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: XX-02P~16P
- ⑥ Special No.:
 A-With Link Stopper DIP-3.20mm
 A2-With Link Stopper DIP-2.50mm
 A3-With Link Stopper DIP-1.50mm
- ⑦ HF-Halogen Free ; Blank-ROHS
- ⑧ Material: N0 -PA66 UL 94V-0
- ⑨ Plating Category: SN-Bright Tin Plating
 V01-Gold Flash
- ⑩ Color : Blank-Natural Color
 BE-Beige Color

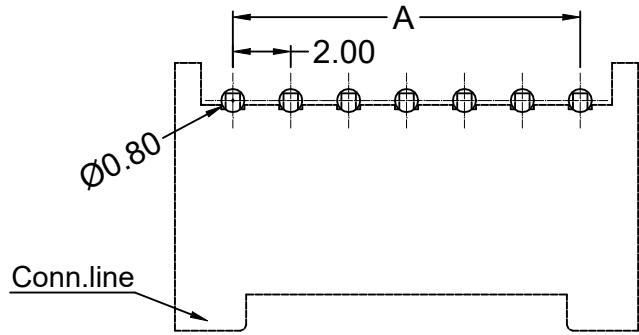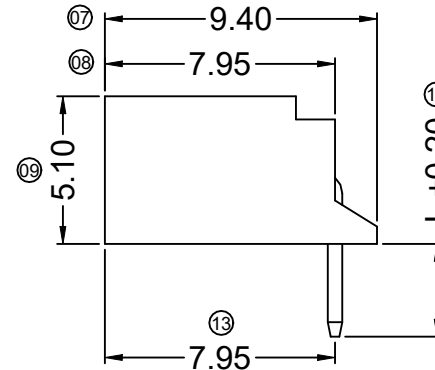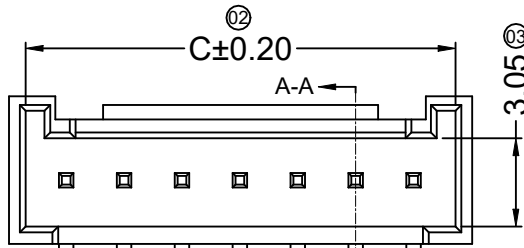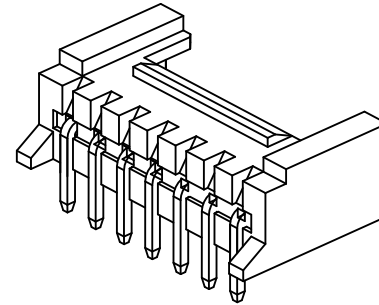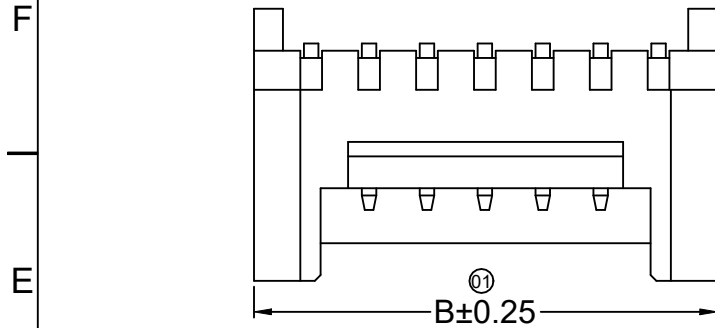

Recommended P.C.B Layout T=1.6mm
 General Tolerance±0.05







Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	6.00	4.85	10	18.00	22.00	20.85
03	4.00	8.00	6.85	11	20.00	24.00	22.85
04	6.00	10.00	8.85	12	22.00	26.00	24.85
05	8.00	12.00	10.85	13	24.00	28.00	26.85
06	10.00	14.00	12.85	14	26.00	30.00	28.85
07	12.00	16.00	14.85	15	28.00	32.00	30.85
08	14.00	18.00	16.85	16	30.00	34.00	32.85
09	16.00	20.00	18.85				


					GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°				SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.				PART NO. 2011WR-XXAXX-N0XXXX																																													
					APPROVAL PROJECT Jack Zhang				CHECK Larry Yang				DRAWN Guo				TITLE 2.00mm Crimp Style Connector																																									
DATE 2020.4.28					REV F					ECN NO. ER20190430002					DESCRIPTION Update Drawing Frame					MODIFY YYting					APPROVAL Robing					DATE 2014/08/13				UNIT mm					SCALE 1:1					SHEET 1/1					REV F					NUMBER A-000				

RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

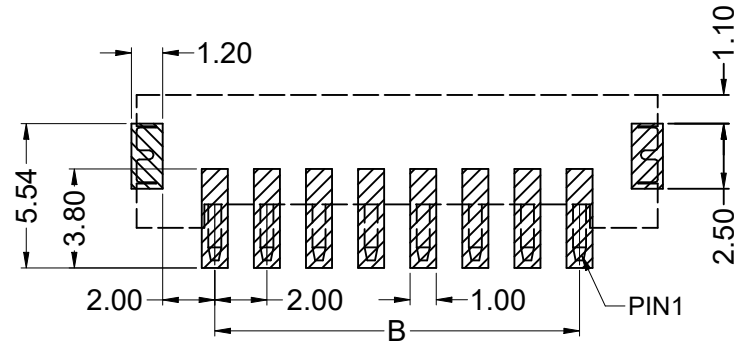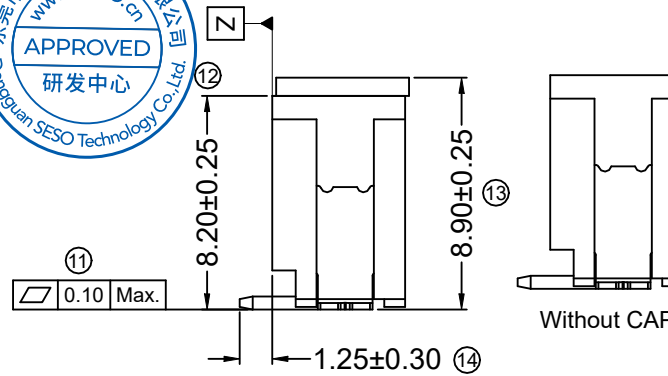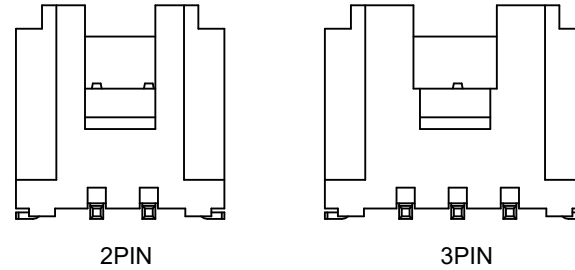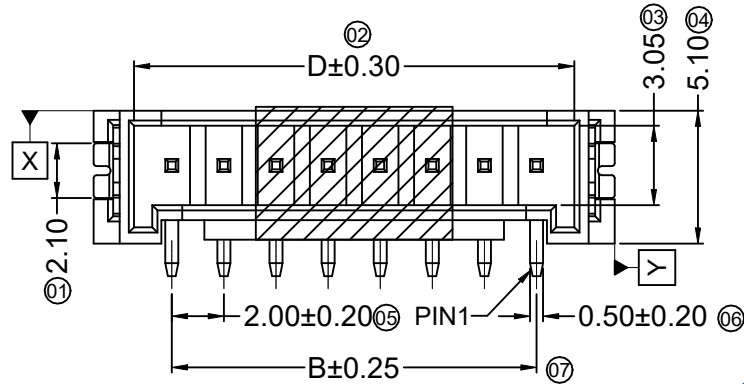

Recommended P.C.B Layout
General Tolerance±0.05



Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤30mΩ
- After environmental testing: ≤40mΩ
- Mates With SESO Housing: 2011H-A

2011 W V S - XX A - LP XX XX X
① ②③④ ⑤⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: S-SMT
- ⑤ Row No.-Pin No.: XX-02P~16P
- ⑥ Plug the Pin & Special No.: A-With Located Block
- ⑦ Material: LP -LCP UL 94V-0
- ⑧ Plating Category:
SN-Bright Tin 100u"Min.;Ni 30u"Min.
V01-Gold Flash;Ni 30u"Min.
V30-All area gold 30u"Min.;Ni 30u"Min.
- ⑨ Color : Blank-Natural Color
- ⑩ Package: Blank-Nature Reel C-Black Reel / ESD R-Reel /Without CAP/ Robotic arm grab product

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
02	8.00	2.00	2.70	4.90	10	24.00	18.00	15.50	20.90
03	10.00	4.00	2.70	6.90	11	26.00	20.00	15.50	22.90
04	12.00	6.00	3.50	8.90	12	28.00	22.00	15.50	24.90
05	14.00	8.00	5.50	10.90					
06	16.00	10.00	7.50	12.90					
07	18.00	12.00	9.50	14.90					
08	20.00	14.00	11.50	16.90					
09	22.00	16.00	13.50	18.90					

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	PROJECT	APPROVAL	CHECK	DRAWN	DATE	UNIT	SCALE	SHEET	REV	NUMBER
2022/09/30	E1	/	Add Reel /Without CAP/ Robotic arm grab product specification	Alan qin	Robing	GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10 X.° ±2°	APPROVAL	CHECK	DRAWN	DATE	mm	1:1	1/1	E1	A-253
2019/07/15	E	EN20210506001	1.Add Gold 30u" P/N 2.Change Sn from 80u" to 100u"	Mali	Robing		Jack Zhang	Larry Yang	Guo	2017/09/27					

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.

PART NO.
2011WVS-XXA-LPXXXXX





TITLE
2.00mm Crimp Style Connectors

RoHS


This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

Specifications :


- Voltage rating: 250V AC / DC
 - Current rating: 3A AC / DC
 - Withstanding voltage: 1000V AC/minute
 - Temperature range: -40°C~+105°C
 - Insulation resistance: ≥1000MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing: ≤40mΩ
 - Pin Material :Brass
 - CAP Material :02-05PIN LCP Natural Color
06-16PIN PA4T Black Color
 - Mates With SESO Housing:2011H-A
- 2011 W V X-XX AX XX-XX XX XX X
- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪
- ① Series No.
 - ② Category: W-WAFER
 - ③ Connector Type: V-Straight 180°
 - ④ Mounting Type: Blank-DIP
 - ⑤ Row No.-Pin No.: XX-02P~16P
 - ⑥ Special No.:
A-Without Baffle DIP=3.30mm
A1-Without Baffle DIP=2.60mm
A2-Without Baffle DIP=1.80mm
A3-Without Baffle DIP=1.35mm
 - ⑦ HF-Halogen Free ; Blank-ROHS
 - ⑧ Material: N0-PA66 UL 94V-0 LP-LCP UL 94V-0
 - ⑨ Plating Code: SN-Bright Tin 100uMin.;Ni 50-100u"
V01-Gold Flash;Ni 50-100u"
V05-Gold-Plating 5u"Min.;Ni 50-100u"
V30-Gold-Plating 30u"Min.;Ni 50-100u"
 - ⑩ Color : Blank-Natural Color BE-Beige Color
 - ⑪ Package: Blank-Bag / Without CAP
R-Reel / Without CAP C-Reel / With CAP

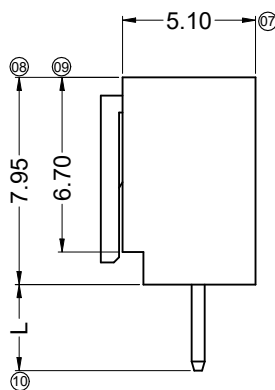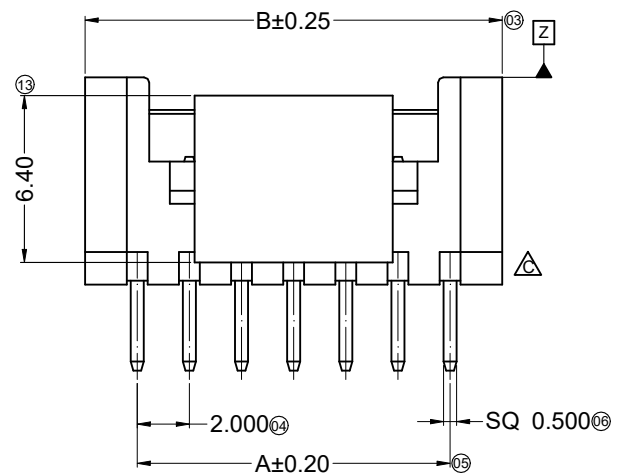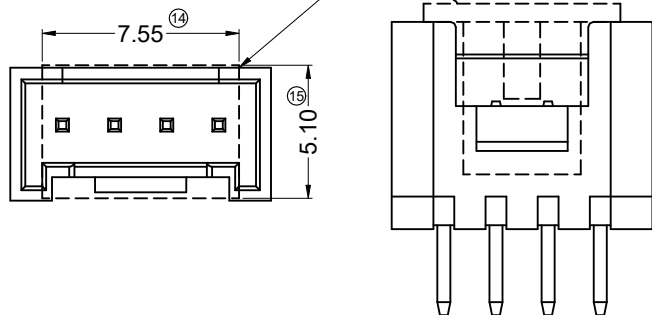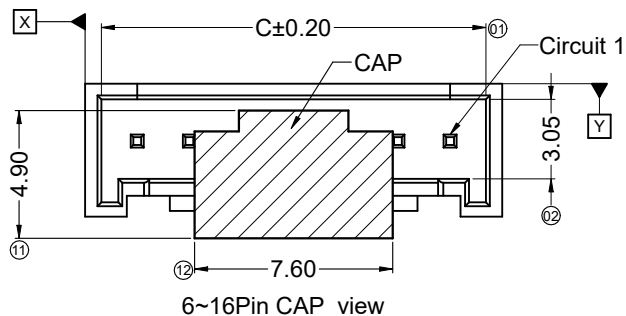

A	L=3.30mm
A1	L=2.60mm
A2	L=1.80mm
A3	L=1.35mm

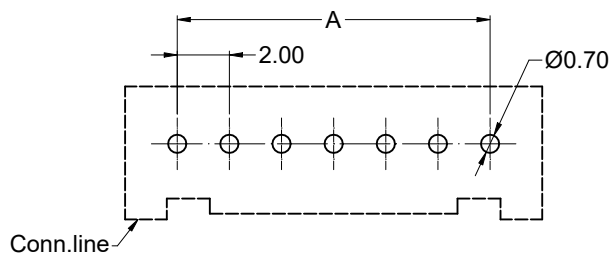

Recommended P.C.B Layout
General Tolerance±0.05

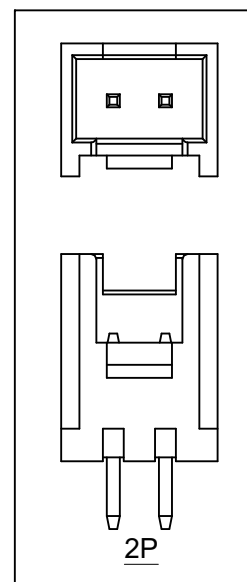

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.00	6.00	4.85	10	18.00	22.00	20.85
03	4.00	8.00	6.85	11	20.00	24.00	22.85
04	6.00	10.00	8.85	12	22.00	26.00	24.85
05	8.00	12.00	10.85	13	24.00	28.00	26.85
06	10.00	14.00	12.85	14	26.00	30.00	28.85
07	12.00	16.00	14.85	15	28.00	32.00	30.85
08	14.00	18.00	16.85	16	30.00	34.00	32.85
09	16.00	20.00	18.85				

2023/07/06	E5	EN20230706003	Changing plating specifications: Nickel base is controlled by 50-100u"	Sunny Huang	Larry Yang	GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX±0.10 X.° ±2° PROJECT	APPROVAL	CHECK	DRAWN	DATE	PART NO. 2011WV-XXAXXX-XXXXXXX	TITLE 2.00mm Crimp Style Connectors	UNIT	SCALE	SHEET	REV	NUMBER									
2023/06/28	E4		Added CAP color description	Sunny Huang	Larry Yang													APPROVAL	Larry Yang	Guo	2016/11/11	mm	1:1	1/1	E5	CD
2023/03/03	E3		Added DIP=1.35mm P/N	Sunny Huang	Larry Yang													APPROVAL	Larry Yang	Guo	2016/11/11	mm	1:1	1/1	E5	CD
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL													PROJECT	APPROVAL	CHECK	DRAWN	DATE	PART NO.	TITLE	UNIT	SCALE

SMS 东莞市思索技术股份有限公司
Dongguan SESO Technology Co.,Ltd.