



Crimp specification						
Type Document Crimp Specification Revised /Edition A						
Date Issued: 2020/11/08 Data Revised: 2023/10/07						
Subject: 2021TH	Issued By:					
2.00mm Pitch Terminal crimp specification Engineering Dept.						

#### Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)


According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

## Position Graph:

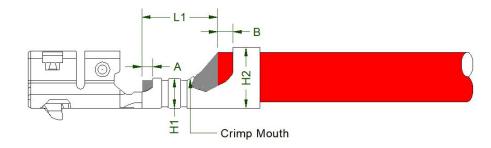

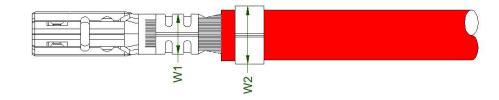

#### Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





Crimp specification						
Type Document Crimp Specification Revised /Edition A						
Date Issued: 2020/11/08 Data Revised: 2023/10/07						
Subject: 2021TH Issued By:						
2.00mm Pitch Terminal crimp specification Engineering Dept.						

# Requirement:

Subject:FLRY-A or equivalent type electric wire						
AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter		lator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#22	0.35mm <sup>2</sup>	1.40mm(max)	1.40mm(max) 0.20mm~0.70mm		0.10mm~0.50mm	1.80~2.30mm
Wire Gauge	Wire Gauge Conductor Crimp Area			Insulator Crimp Area		Terminal Tensile
(AWG#)	Width (W1)	Height(H1	)	Width (W2	) Height(H2)	Strength
0.35mm <sup>2</sup>	1.25±0.03mm	0.82±0.03m	m	1.50±0.05mm	1.50±0.05mm	50N

# Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>JACK</u> ENG SWB CONNECTOR CO.,LTD.





Type Document Date Issued:		Crimp Specification 2020/11/08	Revised /Edition Data Revised:	2(	A )23/10/07
ubject: 2021TH			Issued By:		
2.00mm Pitch Terminal crimp specification			Engineering Dept.		
Date	Date REV DESCRIPTION		ΓΙΟΝ	MODIFY	APPROVAL
2020/11/08	А	Initial Issued		/	Kim Huang
2023/10/07	A1	Modifying H1 dimensions		fx	Jack Zhang





Crimp specification						
Type Document Crimp Specification Revised /Edition A1						
Date Issued: 2020/11/08 Data Revised: 2022/05/19						
Subject: 2021T	Issued By:					
2.00mm Pitch Terminal crimp specification Engineering Dept.						

#### Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)


According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

## Position Graph:

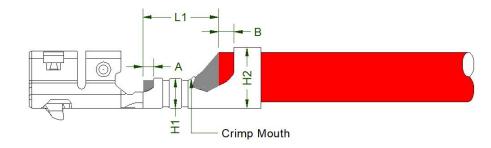

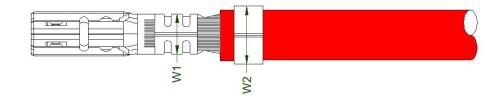

#### Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





Crimp specification					
Type Document	Crimp Specification	Revised /Edition	A1		
Date Issued: 2020/11/08 Data Revised: 2022/05/19					
Subject: 2021T	Issued By:				
2.00mm Pitch Terminal crimp specification Engineering Dept.					

# Requirement:

	Subject:FLRY-A or UL1061equivalent type electric wire						
AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter	Ins	sulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out	
#26~#24	0.128mm <sup>2</sup> ~0.22mm <sup>2</sup>	1.00mm~1.20mm		).20mm~0.70mm	0.10mm~0.50mm	1.80~2.30mm	
Wire Gauge	Conducto	r Crimp Area	Crimp Area		Insulator Crimp Area Te		
(AWG#)	Width (W1)	Height(H1)		Width (W2)	Height(H2)	Strength	
26#	1.05±0.03mm	0.59±0.03mm		1.45+0.05mm	1.25±0.05mm	13.7N	
0.22mm <sup>2</sup>	1.05±0.03mm	0.67±0.03mm		1.45±0.05mm	1.30±0.05mm	40N	

# Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.