
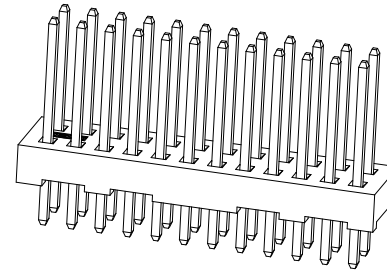




RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

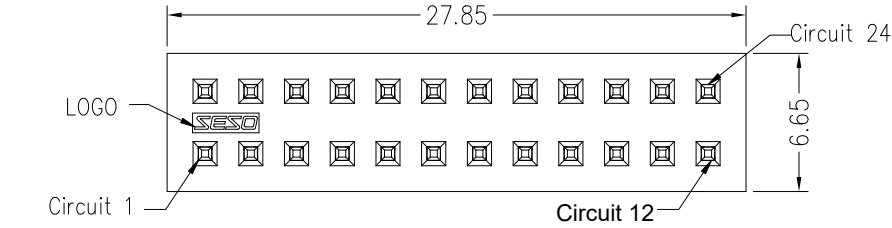


■ Specifications :

- Voltage rating:16V DC
- Current rating:3.0A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -45°C~+105°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 8m\Omega$
- After environmental testing: $\leq 16m\Omega$
- Material(Pin): Brass

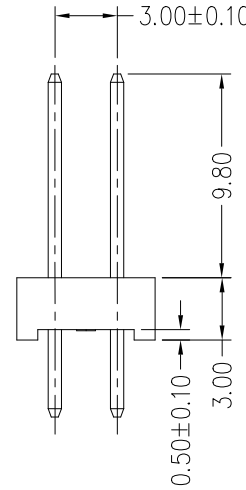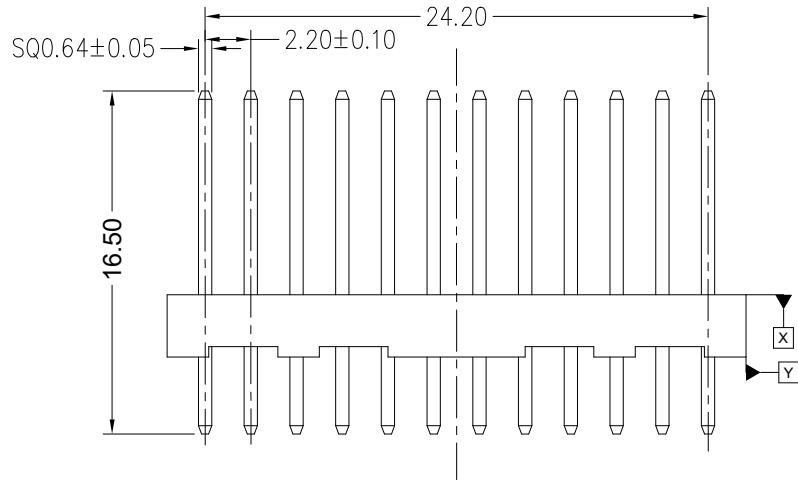

2208 W V X- 2*12 X - 4T XXX B T- XX Q
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

- ① Series No.
- ② Category:W-Wafer
- ③ Connector Type: V- 180°
- ④ Mouting Type: Blank-DIP
- ⑤ Row No.-Pin No.: 2*12-2*12Pin
- ⑥ Special No.:
- ⑦ Material:4T-PA4T 94V-0
- ⑧ Plating Category:
 SW2- Matte tin plating 120u"Min,50u" Ni Min.
 SN2- Bright tin plating 120u"Min,50u" Ni Min
- ⑨ Color:B-Black
- ⑩ Packing: T-Tray
- ⑪ Special No.:
- ⑫ Special code:Q-Automotive Connectors

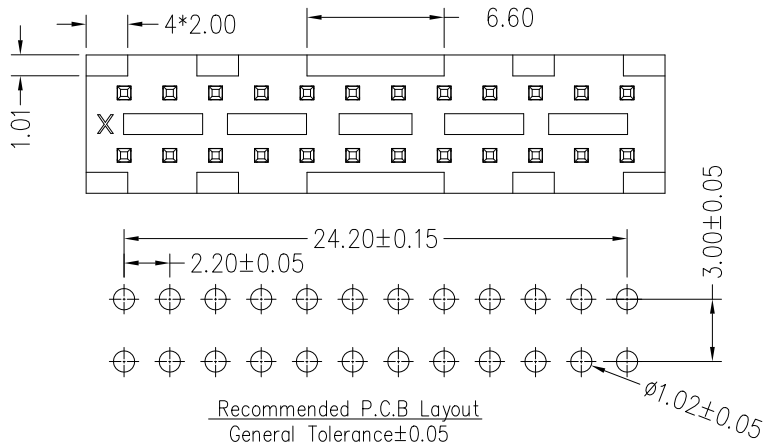

| | | | | | | | | | | | | | | |
|----------|-----|--------|-------------|------------|-------------------|------------|------------|-------|------------------------------|-----|-------|-------|-------|--------|
| | | | | | GENERAL TOLERANCE | | | | PART NO. | | | | | |
| | | | | | .X ±0.35 | | | | 2208WV-2*12-4TXXXBT-XXQ | | | | | |
| | | | | | .XX ±0.25 | | | | TITLE | | | | | |
| | | | | | .XXX±0.15 | | | | 2.20mm Pin Header Connectors | | | | | |
| | | | | | X.±2' | | | | UNIT | | | | | |
| 20240407 | A1 | / | Update font | Flynt Chen | Larry Yang | APPROVAL | CHECK | DRAWN | DATE | mm | SCALE | SHEET | REV | NUMBER |
| DATE | REV | ECN NO | DESCRIPTION | MODIFY | APPROVAL | Larry Yang | Larry Yang | Zeng | 2022/11/21 | 1:1 | 1/1 | A1 | A-000 | |

SMS 东莞市思索技术股份有限公司
 Dongguan SESO Technology Co.,Ltd.