


RoHS

This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

Preliminary drawing
This is subject to change without notice

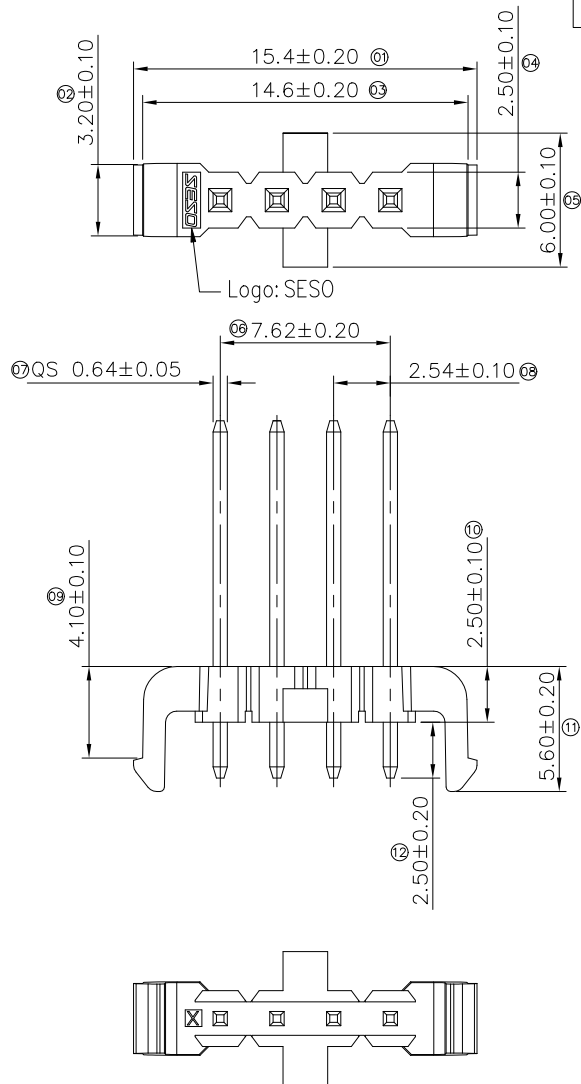


Specifications :

- Voltage rating: 250V AC/DC
- Current rating: 5A AC/DC
- Withstanding voltage: 800V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: >100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ
- Material(Pin): Brass

2569 W V X-04 -PT SN B B -Q
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
- ② Category: W-Wafer
- ③ Connector Type: V- 180°
- ④ Mounting Type: Blank-DIP
- ⑤ Row No.-Pin No.: 04-04Pin
- ⑥ Plastic Material: PT-PBT 94V-0
- ⑦ Plating Code:
SN-Bright tin plating 80~200u"(2~5um), 30u" Ni Min
- ⑧ Color: B-Black
- ⑨ Packing: B-Bag
- ⑩ Special code: Q-Automotive Connectors



					<p>GENERAL TOLERANCE</p> <p>.X ±0.35</p> <p>.XX ±0.25</p> <p>.XXX±0.15</p> <p>X.' ±2'</p>				<p>SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.</p>				PART NO. 2569WV-04-PTSNNB-Q				
					<p>PROJECT</p> <p>APPROVAL</p> <p>DATE</p>								TITLE: 2.54mm Pin Header Connectors				
DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL	Larry Yang	Larry Yang	Susan Liu	2023/3/24	UNIT	SCALE	SHEET	REV	NUMBER			
1										mm	1:1	1/1	A0	A-013			