Crimp specification									
Type Document	Type Document								
Date Issued:	2020/07/10	Data Revised:	2020/07/10						
Subject:9025TR	Issued By:								
2.50mm	2.50mm Pitch Terminal crimp specification								


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

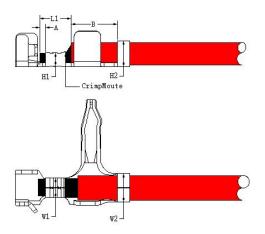

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.

Crimp specification									
Type Document	Type Document								
Date Issued:	2020/07/10	Data Revised:	2020/07/10						
Subject:9025TR	Issued By:								
2.50mm	2.50mm Pitch Terminal crimp specification								

Subject:UL1061 or equivalent type electric wire							
AWG#	Conductor (mn	n²) Insulation Di		Insulation Diameter		lator skins length (Dim .B) mm	Dim. L1 (mm) out
#26~#22	0.128mm ² ~0.305	mm²	1.00~1	.30mm	2	2.10~2.30mm	1.80~2.00mm
Wire Gauge	Conductor	Crimp Area		Insulator Crimp Area		Terminal Tensile	
(AWG#)	Width (W1)	Н	eight(H1)	Width	(W2)	Height(H2)	Strength
#26		0.	0.65±0.03mm			1.45±0.05mm	1.40kgf
#24	1.27±0.03mm	0.	76±0.03mm	1.85±0.05	imm	1.55±0.05mm	2.30kgf
#22		0.	80±0.03mm			1.65±0.05mm	3.60kgf

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Crimp specification							
Type Document Crimp Specification Revised /Edition A2							
Date Issued:	2020/07/10	Data Revised:	2023/09/06				
Subject:9025TR			Issued By:				
2.50mm	2.50mm Pitch Terminal crimp specification						


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

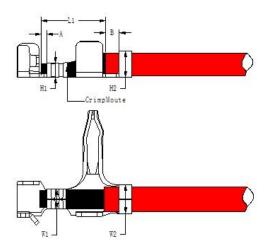

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.



Crimp specification							
Type Document Crimp Specification Revised /Edition A2							
Date Issued:	2020/07/10	Data Revised:	2023/09/06				
Subject:9025TR	Subject:9025TR						
2.50mm	Engineering Dept.						

Subject:FLRY-A or equivalent type electric wire							
AWG#	Conductor (mn	n²) Insulation Diameter		Insulator skins length (Dim .B) mm		Dim. L1 (mm) out	
#24~#22	0.22mm²~0.35m	nm²	m² 1.10~1.30mm		2.10~2.30mm		1.80~2.00mm
Wire Gauge	Conductor	Conductor Crimp Area		Insulator Crimp Area			Terminal Tensile
(AWG#)	Width (W1)	Н	Height(H1) Width (W2		(W2)	Height(H2)	Strength
0.22mm ²	1.34±0.03mm	0.	0.77±0.03mm		mm	1.55±0.05mm	40N
0.35mm²	1.54±0.0511111	0.	83±0.03mm	1.90±0.05mm		1.65±0.05mm	50N

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.



Crimp specification							
Type Document							
Date Issued:	2020/07/10	Data Revised:	2023/09/06				
Subject:9025TR	Issued By:						
2.50mm	Engineering Dept.						

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2018/05/17	А	Initial Issued	/	Kim Huang
2022/05/19	A1	Modify cable OD	Fx	Kim Huang
2023/09/06	A2	Modifying H1 dimensions	Fx	Jack Zhang

Crimp specification									
Type Document	Type Document								
Date Issued:	2020/07/10								
Subject:9025TV	Issued By:								
2.50mm	Engineering Dept.								


Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

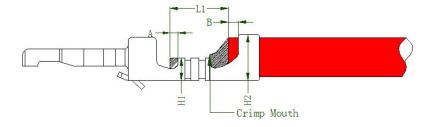



- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.

Crimp specification									
Type Document	Type Document								
Date Issued:	2020/07/10								
Subject:9025TV	Issued By:								
2.50mm	Engineering Dept.								

Subject:UL1061or equivalent type electric wire							
AWG#	Conductor (mn	nm²) Insulation		Insulation Diameter		lator skins length (Dim .B) mm	Dim. L1 (mm) out
#26~#22	0.128mm²~0.305	mm²	1.00~1	.30mm	(0.30~0.50mm	1.50~1.70mm
Wire Gauge	Conductor	r Crimp Area		Insulator Crimp Area			Terminal Tensile
(AWG#)	Width (W1)	Н	eight(H1)	Width	(W2)	Height(H2)	Strength
#26		0.	0.70±0.03mm			1.45±0.05mm	1.40kgf
#24	1.30±0.03mm	0.	75±0.03mm	1.85±0.05	imm	1.55±0.05mm	2.30kgf
#22		0.	81±0.03mm			1.65±0.05mm	3.60kgf

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Crimp specification									
Type Document	Type Document								
Date Issued:	2022/05/19								
Subject:9025TV	Issued By:								
2.50mm	2.50mm Pitch Terminal crimp specification								


Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

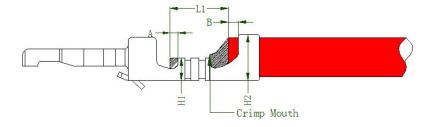



- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.

Crimp specification						
Type Document	A1					
Date Issued: 2020/11/02		Data Revised:	2022/05/19			
Subject:9025TV	Issued By:					
2.50mm	Engineering Dept.					

Subject:FLRY-A or equivalent type electric wire							
AWG#	Conductor (mm²)		Insulation Diameter		Insulator skins length (Dim .B) mm		Dim. L1 (mm) out
#24~#22	0.22mm ² ~0.35m	22mm²~0.35mm²		1.10~1.50mm		0.30~0.50mm	1.50~1.70mm
Wire Gauge	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile		
(AWG#) Width	Width (W1)	Н	eight(H1)	Width (W2)		Height(H2)	Strength
0.22mm ²	1.30±0.03mm	0.80±0.03mm		1.85±0.05mm		1.40±0.05mm	40N
0.35mm²	1.30±0.03mm		86±0.03mm	1.05±0.05)111111	1.55±0.05mm	50N

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

Crimp specification						
Type Document Crimp Specification Revised /Edition A						
Date Issued: 2021/07/12		Data Revised:	2021/07/12			
Subject:9025TV	Issued By:					
2.50mm	Engineering Dept.					


Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

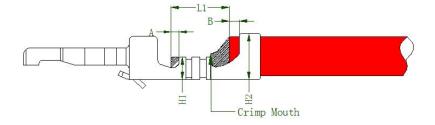



- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.

Crimp specification						
Type Document Crimp Specification Revised /Edition A						
Date Issued: 2021/07/12		Data Revised:	2021/07/12			
Subject:9025TV	Issued By:					
2.50mm	Engineering Dept.					

Subject:FLRY-A or equivalent type electric wire							
AWG#	Conductor (mm²)		Insulation Diameter		Insulator skins length (Dim .B) mm		Dim. L1 (mm) out
#22~#20	0.35mm²~0.50mm²		1.30~1.50mm		0.30~0.50mm		1.50~1.70mm
(AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile		
	Width (W1)	Н	eight(H1)	Width	(W2)	Height(H2)	Strength
0.35mm²	1.30±0.03mm	0.89±0.03mm		1.85+0.05mm		1.70±0.05mm	50N
0.50mm²	1.30±0.0311111	0.	94±0.03mm	1.05±0.05	7111111	1.85±0.05mm	60N

Remarks

Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.

SWB CONNECTOR CO.,LTD.