



| Crimp specification | | | | | |
|---|------------|--|-------------------|--|--|
| Type Document | А | | | | |
| Date Issued: | 2024/01/22 | | | | |
| Subject: 2043TF-HY2B | Issued By: | | | | |
| 2.00mm Pitch Terminal crimp specification | | | Engineering Dept. | | |

Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

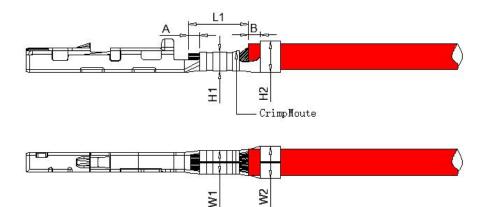

Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





| Crimp specification | | | | | |
|--|------------|--|-------------------|--|--|
| Type Document Crimp Specification Revised /Edition A | | | | | |
| Date Issued: | 2024/01/22 | | | | |
| Subject: 2043TF-HY2B | | | Issued By: | | |
| 2.00mm Pitch Terminal crimp specification | | | Engineering Dept. | | |

Requirement:

| | Subject: FLRYW-A or equivalent type electric wire | | | | | | |
|---------------------|---|----------------------------|---------------------------------------|---|------------------|--|--|
| AWG# | Conductor (mm ²) | Insulation Diameter | Insulator skins length (Dim .B) mm | Copper wire leakage size (Dim .A) mm | Dim. L1 (mm) out | | |
| #24~#22 | 0.22mm ² ~0.35mm ² | 1.30mm(max) | 0.40mm~0.90mm | 0.20mm~0.50mm | 2.40mm~2.90mm | | |
| Wire Gauge | Conductor Crimp Area | | Insulator Crimp Area | | Terminal Tensile | | |
| (AWG#) | Width (W1) Height(H1) Width (W2) | Width (W2) | Height(H2) | Strength | | | |
| 0.22mm ² | 1 20+0 03mm | 0.70±0.03mm | 1.45±0.05mm - | 1.40±0.05mm | 40.0N | | |
| 0.35mm ² | 1.20±0.0511111 | 1.20±0.03mm 0.79±0.03mm | | 1.55±0.05mm | 50.0N | | |

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>7</u>X ENG Dongguan SESO Technology Co.,Ltd





| Crimp specification | | | | | |
|-------------------------|---------------------|------------------|----|--|--|
| Type Document | Crimp Specification | Revised /Edition | A2 | | |
| Date Issued: | 2024/01/22 | | | | |
| Subject: 2043TH-HY2B-01 | Issued By: | | | | |
| 2.00mm | Engineering Dept. | | | | |

Description:

Height and width of conductor crimp core should be set as required.


(conductor crimp height and width of conductor barrel)


According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't

be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

Position Graph:

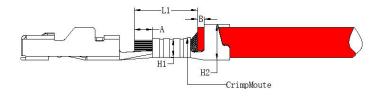



Note:

- 1. Conductor crimp width. W1
- 2. Conductor crimp height. H1
- 3. Insulator crimp width. W2
- 4. Insulator crimp height. H2
- 5. Conductor wire shall be dimension long (mm) out A.
- 6. Naked part of sheathed wire must be located in the vicinity of center B.
- 7. The Crimp mouth must be equipped like bell.





| Crimp specification | | | | | |
|---|------------|--|-------------------|--|--|
| Type Document Crimp Specification Revised /Edition A2 | | | | | |
| Date Issued: | 2024/01/22 | | | | |
| Subject: 2043TH-HY2B-01 | | | Issued By: | | |
| 2.00mm Pitch Terminal crimp specification | | | Engineering Dept. | | |

Requirement:

| Subject: FLRY-B or equivalent type electric wire | | | | | | |
|--|--|---|----------------------|------------------|------------------|--|
| AWG# | Conductor (mm ²) | Conductor (mm ²) Insulation Insulator skins length Copper wire leakage size Diameter (Dim .B) mm (Dim .A) mm | | Dim. L1 (mm) out | | |
| #18~#16 | 1.00mm ² ~1.50mm ² | 2.40mm (max) | 0.40mm~1.00mm | 0.30mm~1.00mm | 3.80mm~4.30mm | |
| Wire Gauge | Conductor Crimp Area | | Insulator Crimp Area | | Terminal Tensile | |
| (AWG#) | Width (W1) | Height(H1) | Width (W2) | Height(H2) | Strength | |
| 1.00mm ² | 1.95±0.05mm | 1.16±0.05mm | 2.40±0.05mm | 2.30±0.05mm | 120.0N | |
| 1.50mm ² | 2.00±0.05mm | 1.39±0.05mm | 2.70±0.05mm | 2.55±0.05mm | 150.0N | |

Remarks

- 1. Unalike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
- 2. This crimping specification is not limited to material changes.

Signature: <u>7%</u>ENG

Dongguan SESO Technology Co.,Ltd





| | | Crimp spe | cification | | | |
|---|------|---------------------|-------------------------|-------------------|------------|--|
| Type Docu | ment | Crimp Specification | Revised /Edition | A2 | | |
| Date Issu | ed: | 2023/10/20 | Data Revised: | 202 | 24/01/22 | |
| Subject: 2043TH-HY2B-01 | | | | | Issued By: | |
| 2.00mm Pitch Terminal crimp specification | | | Engine | Engineering Dept. | | |
| | | | | | | |
| Date | REV | DESCRIPTION | | MODIFY | APPROVAL | |
| 2023/10/20 | A | Initial Issued | | / | Jack Zhang | |

| 2023/10/20 | A | Initial issued | / | Jack Zhang |
|------------|----|-------------------------------------|----|------------|
| 2023/12/27 | A1 | Modified H1 tolerance | FX | Jack Zhang |
| 2024/01/22 | A2 | Change the terminal material number | FX | Jack Zhang |